


Technical Details

Chartwell Angled Manual Valve (BSP)




MANUAL VALVE

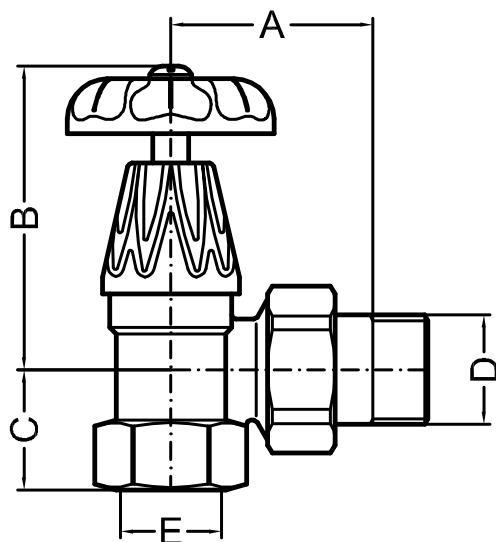

D	A	B	C	E
1/2"	55	72	28.5	1/2"F
3/4"	50	72	28.5	3/4"F

LOCKSHIELD

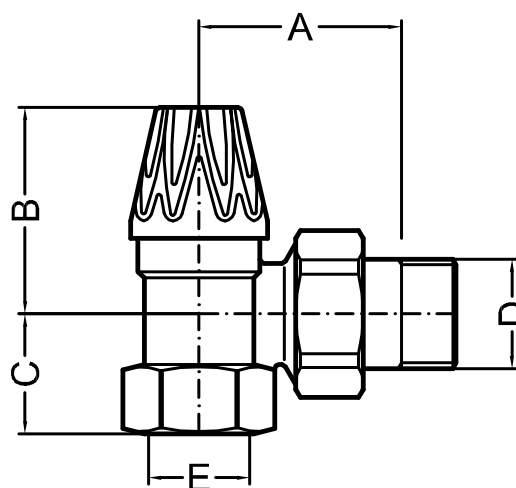

D	A	B	C	E
1/2"	55	49	28.5	1/2"F
3/4"	50	49	28.5	3/4"F


All dimensions are in millimetres & dual dimensions are in inches.

Technical features

- Suitable for 1/2" or 3/4" BSP
- Maximum working pressure: 10 bar
- Maximum temperature: 100°C
- Body construction: Brass



Installation of valve body

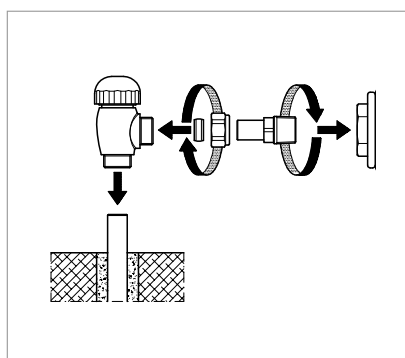

Following the diagram shown, apply appropriate PTFE to the threaded part of the radiator tail piece & apply appropriate joining compound when screwing pipework into valve body.

Installation should be undertaken by a competent plumber.



Unit 4 Genesis, Endeavour Drive, Basildon, Essex SS14 3WF

Tel: +44 (0) 345 521 5666 Fax: +44 (0)1268 888260

mhs@modularhg.co.uk orders@modularhg.co.uk

aftersales@modularhg.co.uk www.mhsradiators.co.uk



URS CERTIFICATE NO.54300



URS CERTIFICATE NO.54300



URS CERTIFICATE NO.54300

SALES OFFICE - +44 (0)1268 546789

AFTER SALES SUPPORT - +44 (0)1268 546775

CB240426