


Technical Details


Kentwell Angled Manual Valve



MANUAL VALVE

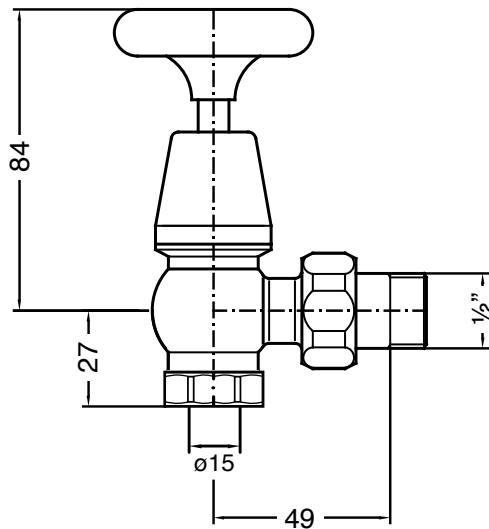

LOCKSHIELD

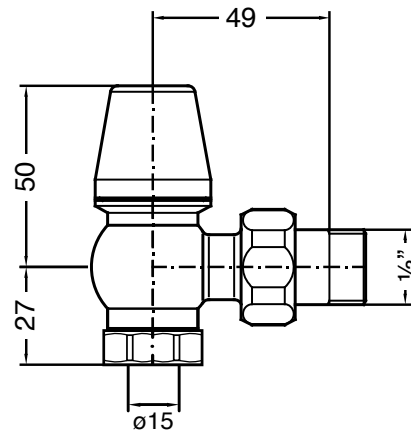


All dimensions are in millimetres & dual dimensions are in inches.

Technical features

- Suitable for 15mm copper pipe
- Maximum working pressure: 10 bar
- Maximum temperature: 100°C
- Body construction: Brass

Installation of valve body

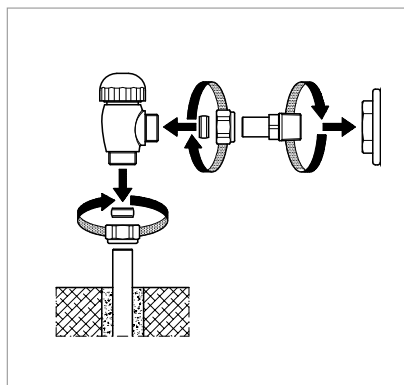

Following the diagram shown, apply appropriate PTFE to the threaded part of the radiator tail piece & apply appropriate joining compound when fitting compression fitting between the copper pipework and the valve body.

Installation should be undertaken by a competent plumber.



Unit 4 Genesis, Endeavour Drive, Basildon, Essex SS14 3WF
Tel: +44 (0) 345 521 5666 Fax: +44 (0)1268 888260
mhs@modularhg.co.uk orders@modularhg.co.uk
aftersales@modularhg.co.uk www.mhsradiators.co.uk



SALES OFFICE - +44 (0)1268 546789 AFTER SALES SUPPORT - +44 (0)1268 546775