

Louisa®

Overview



Louisa®

Technical

An elegant steel towel warmer with horizontal tubes, the Louisa is the perfect fusion of form and fashion. Boasting a distinct personality while providing exceptional levels of warmth, this emitter has a large surface area suitable for an array of applications and heating systems.

Features


- Types - Central Heating, Dual Fuel & Electric
- Steel ø18mm horizontal tubes, fixed to ø30mm headers
- A choice of 80 finishes
- Single or Double models
- Heights - 760, 1160, 1410, 1885 & 2110mm
- Widths - 430, 480, 530 & 580mm
- Outputs - 436-2042 watts
- Warranty - 5 years (2 years on electrical components)



Single



Double

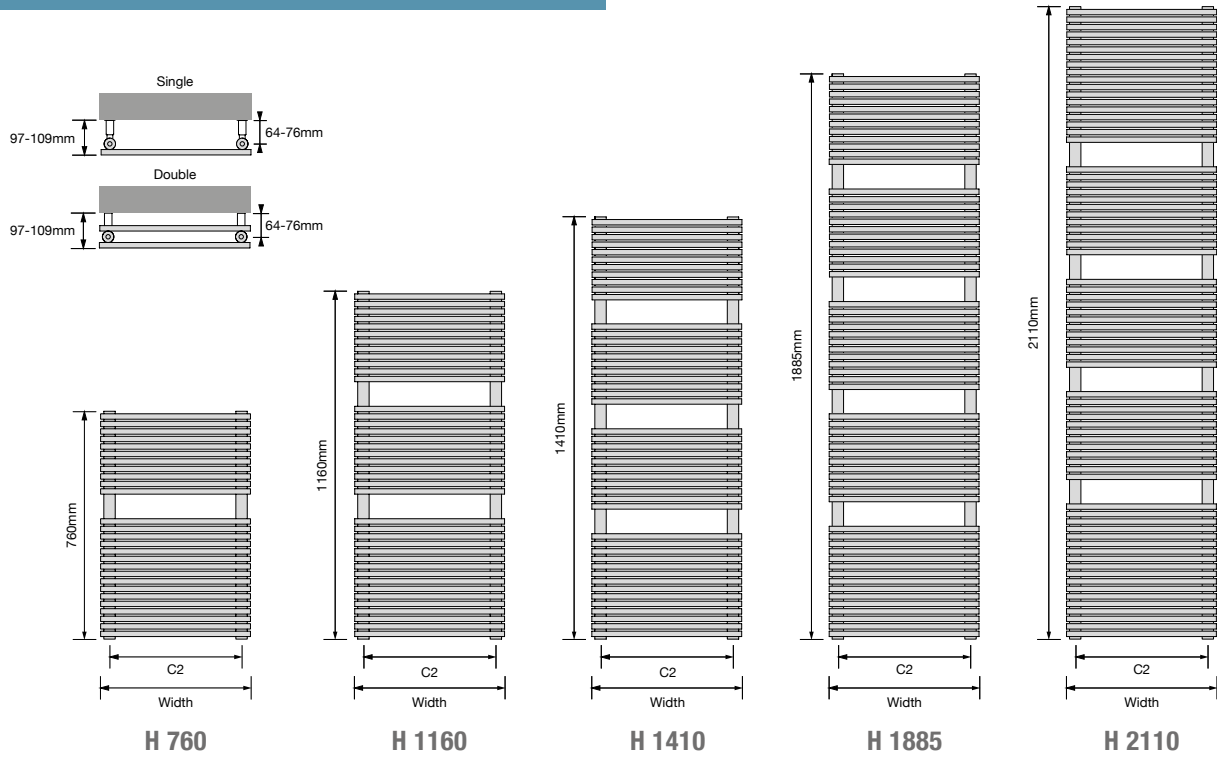


	Height (mm)	Width (mm)	C2 Centres (mm)	Weight (kg)	Water content (litres)	Output (watts Δt 50°C)	Smart Electric Element (watts)
Single	760	430	400	6.7	2.9	436	400
	760	480	450	8.0	3.3	489	400
	1160	430	400	11.0	4.6	631	600
	1160	480	450	12.0	4.9	705	600
	1160	530	500	13.0	5.3	779	600
	1160	580	550	13.9	5.7	852	800
	1410	430	400	13.0	5.4	753	600
	1410	480	450	14.2	5.9	838	800
	1410	530	500	15.3	6.2	923	800
	1410	580	550	16.5	6.4	1008	800
	1885	430	400	17.5	7.3	986	800
	1885	480	450	19.1	7.9	1090	800
	1885	530	500	20.5	8.5	1194	800
	1885	580	550	22.2	9.1	1298	800
	2110	530	500	23.4	9.7	1322	800
Double	2110	580	550	25.2	10.3	1438	800
	2110	730	700	30.7	12.5	1768	800
	760	430	400	12.7	5.1	565	600
	760	480	450	14.0	5.6	711	600
	1160	430	400	19.5	7.9	821	800
	1160	480	450	21.5	8.7	1018	800
	1160	530	500	23.5	9.4	1215	800
	1160	580	550	25.3	10.2	1609	800
	1410	430	400	23.0	9.4	957	800
	1410	480	450	25.4	10.2	1183	800
	1410	530	500	27.2	11.3	1421	800
	1410	580	550	30.2	12.0	1897	800
	1885	430	400	31.0	12.5	1268	800
	1885	480	450	34.0	13.7	1565	800
	1885	530	500	37.2	14.9	1861	800
	1885	580	550	40.3	16.1	2042	800

For Δt 30°C, apply a correction factor of 0.515. For other operating temperatures, refer to page 131.



Single

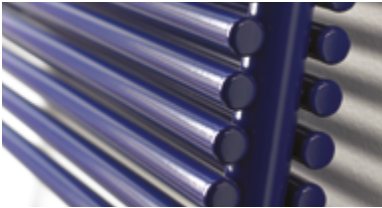

Double