

Decoral® Vertical Overview



Decoral® Vertical Technical

The aluminium Decoral Vertical radiator is finished in RAL 9010 Warm White. The Decoral Vertical radiators have a 16 bar maximum working pressure (24 bar test) and are supplied with wall brackets and 1/2" BSP-f connections. The Decoral Vertical carries a 10-year guarantee against manufacturing defects.

Features

- Material - 100% recycled/recyclable aluminium
- Finish - RAL 9010 Warm White
Other colours available on request.
- Heights - 966-2066mm
- Widths - 260-660mm
- Outputs - 546-2400 watts
- Maximum Working Pressure - 16 bar (24 bar test)
- Warranty - 10 years




Technical data per section

	Height (mm)						
	966	1066	1266	1466	1666	1866	2066
Weight (kg)	1.96	2.20	2.50	2.80	3.00	3.40	3.80
Water content (litres)	0.43	0.47	0.55	0.62	0.70	0.78	0.86

Performance data

Width (mm)	260	340	420	500	580	660	260	340	420	500	580	660
Sections	3	4	5	6	7	8	3	4	5	6	7	8
Height (mm)	Output (watts Δt 50°C)						Output (watts Δt 30°C)					
966	546	728	910	1092	-	-	281	375	469	562	-	-
1066	585	780	975	1170	-	-	301	402	502	603	-	-
1266	669	892	1115	1338	-	-	345	459	574	689	-	-
1466	750	1000	1250	1500	-	-	386	515	644	773	-	-
1666	825	1100	1375	1650	-	-	425	567	708	850	-	-
1866	900	1200	1500	1800	2100	2400	464	618	773	927	1082	1236
2066	972	1296	1620	1944	-	-	501	667	834	1001	-	-

For other operating temperatures, refer to page 131.

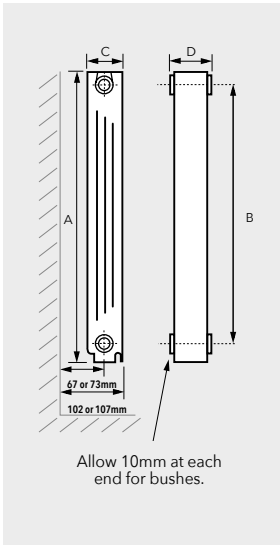

Technical data per section

	Height (mm)						
	966	1066	1266	1466	1666	1866	2066
Height A	966	1066	1266	1466	1666	1866	2066
Centres B	900	1000	1200	1400	1600	1800	2000
Depth C	90	90	90	90	90	90	90
Width D	80	80	80	80	80	80	80
Max No. Sections	6	6	6	6	6	8	6
Max Working Pressure	16	16	16	16	16	16	16
Max Test Pressure	24	24	24	24	24	24	24

Radiators over the stated maximum number of sections must be assembled on site. Please contact our sales office for more information